

Part No. ASU3016-U2-1000-120-D



Type UI30/16.5

Power 10.0 VA

Weight 260g

shipping unit per box: 18 pcs temperature class: ta 50°C/B


Vacuum filled casting

Split bobbin design winding

Dielectric strength 3750Vrms

PART NO	Output ta 50°C/B	Prim.V	Connecting pins	Operating point sec. ± 10%	Connecting pins	No-load voltage V ± 10%
ASU3016-U2-1000-120-D	10.0 W	115	1---3	12V 416.6mA	10---12	15.9V
		115	5---7	12V 416.6mA	14---16	15.9V

According to

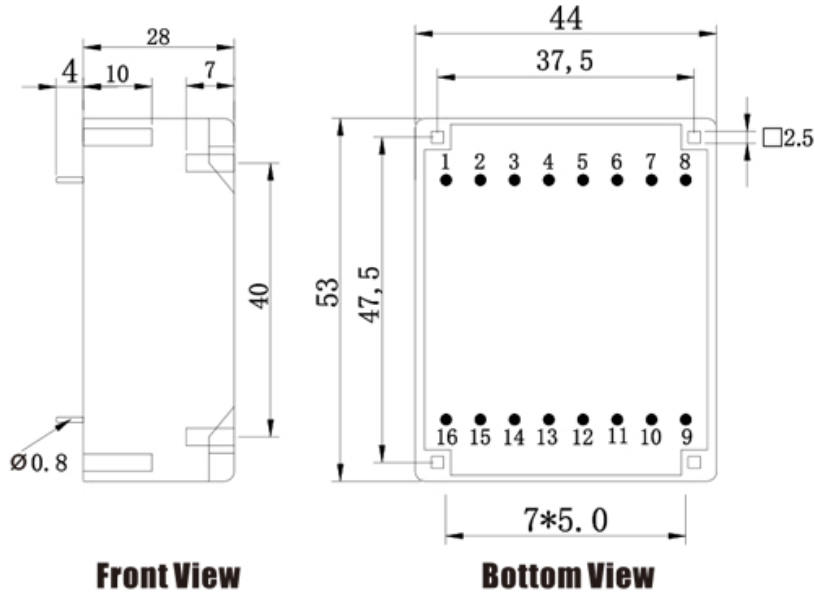

Front View

Bottom View

Tolerances : <10mm ±0.3mm
10--50mm ±0.5mm

Custom-made transformer also will be welcome.

Schematics

